


## Connection Diagram Fax Server ISDN 2

### Fax Server ISDN

There are three ways to use a Fax Server ISDN Basic Rate:

- Stand alone on one or more lines that are used for the Fax Server only.
- Together with other equipment such as the PBX
- Together with other equipment such as the PBX and Fax Recording

Always use the supplied T-splitters to connect to the ISDN S0 line. The figure is an example of a possible setup of the Fax Server ISDN Basic Rate.

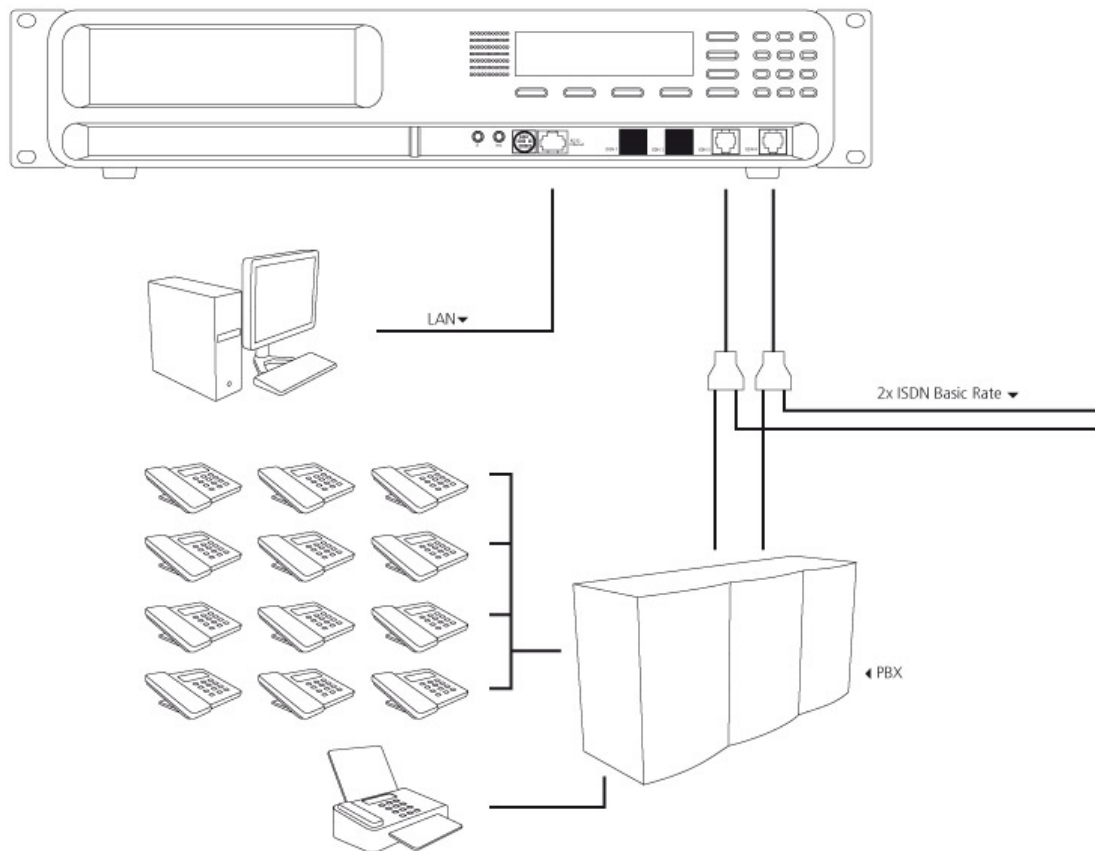

## In pass through mode

This is the most often used method to connect the Fax Server on ISDN basic rate. We call this "pass through mode". The difference is that the Fax Server can see and record all communication of connected terminal equipment. This is used for recording fax transmissions of other fax machines.

All terminal equipment (TE) that must be recorded is connected to the TE port of the adapter. Usually this will be the PBX with one or more fax machines connected to it.

